




FranMar International Inc.

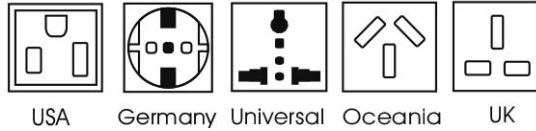

A301-150W(O)+USB		
ITEMS	DC12V	DC24V
OUTPUT POWER	150W CONTINUE	
	300W FOR SURGE OUTPUT	
INPUT VOLTAGE	DC 10-15V	DC 20-30V
OUTPUT VOLTAGE	AC 100V,110V,120V,220V,230V,240V	
OUTPUT VOLTAGE REGULATION	+/- 5%	
OUTPUT WAVEFORM	MODIFIED SINE WAVE	
OUTPUT FREQUENCY	50 OR 60 HZ	
USB POWER OUTPUT	DC 5V 500mA	DC 5V 500mA
BATTERY LOW ALARM	DC 10+/- 0.5V	DC 20 +/- 0.8V
BATTERY LOW SHUTDOWN	DC 9.5+/- 0.5V	DC 19.5+/- 0.8V
STANDBY CURRENT	0.25A	0.2A
EFFICIENCY	90%	
THERMAL PROTECT	60 +/- 0.5°C	
COOLING	BY AIR CONVECTION	
PROTECTIONS	SOFT START	
	OUTPUT SHORT : SHUTDOWN	
	INPUT POLARITY REVERSE : BY FUSE	
	HIGH VOLTAGE INPUT :SHUTDOWN	
	LOW VOLTAGE INPUT : SHUTDOWN	
	OVERLOAD : SHUTDOWN	
	OVERTEMPERTURE : SHUTDOWN AFTER BUZZER, KEEP SOUNDING FOR ONE MINUTE	
	BATTERY LOW : ALARM	
	TROUBLE DISPLAY : LED	
FUSE	15A	10A
AC OUTLET	ONE AC OUTLET	
SIZE(LxWxH)	165x94x69 mm	
WEIGHT	0.43 kgs	